

Technical Data		GP 2500A*	GP 2600*	GP 3800A	GP 4000	GP 5600A/ GP 5600A with wheel kit/ GPS 5600A	GP 6600A/ GP 6600A with wheel kit/ GPS 6600A
Length x width x height	in	22.2 x17.1x17.5	24.2x17x21.5	27x21x21.2	27x21x21.2	27x21x21.2 39.5x27x26.7 34.3x21x21.2 (685x530x540)	27x21x21.2 39.5x27x26.7 34.3x21x21.2 (685x530x540)
	(mm)	(565x435x445)	(615x435x545)	(685x530x540)	(685x530x535)	(1005x685x680) (870x530x540)	(1005x685x680) (870x530x540)
Dry weight	lb (kg)	98 (44.5)	105 (47.7)	160 (72.6)	152 (68.9)	186 (84) 208 (94.3) 201 (91)	192 (87) 213 (96.6) 206.5 (94)
	Shipping size (l x w x h)	in	23.2x17.6x19.5	25.2x17.7x23.5	28x21.5x23.2	28x21.5x23.2	28x21.5x23.2 28x27x23.2 28x27x23.2 (710x545x590) (710x685x590)
Shipping weight	lb (kg)	103 (46.7)	111 (50.4)	165 (74.8)	157 (71.2)	191 (87) 213 (97) 206 (93)	197 (89) 218 (99) 212 (96)
	Maximum output	W	2500	2600	3800	4000	5600
Continuous output	W	2250	2250	3400	3600	5000	6000
Continuous AC amps (120/240V)	A	18.8	18.8	28.3/14.2	30/15	41.7/20.8	50/25
AC circuit breaker amps	A	20	20	16	17	23	27
Frequency	Hz	60	60	60	60	60	60
Phase	Ø	1	1	1	1	1	1
Power factor	Pf	1	1	1	1	1	1
Engine type		air-cooled, 4-cycle, single cylinder, gasoline engine					
Starting system		Honda	Wacker Neuson	Honda	Wacker Neuson	Honda	Honda
		recoil	recoil	recoil	recoil	recoil recoil 12V electric	recoil recoil 12V electric
Displacement	in ³ (cm ³)	10 (163)	10.3 (169)	14.8 (242)	16.2 (265)	20.6 (337)	23.7 (389)
Operating speed	rpm	3600	3600	3600	3600	3600	3600
Max. rated power at rated speed	hp (kW)	4.8 (3.6)	5.7 (4.2)	7.1 (5.3)	9.0 (6.6)	9.5 (7.1)	11.0 (8.2)
	rpm	3600	4000	3600	4000	3600	3600
Power rating specification		SAE J1349	SAE J1349	SAE J1349	SAE J1349	SAE J1349	SAE J1349
Fuel tank capacity	gal (l)	3 (12)	4 (15)	5.2 (19.5)	5.2 (19.5)	5.2 (19.5)	5.2 (19.5)
Running time/full load	hrs	7	10.2	8.2	8.3	6	5
AC outlet receptacles							
125V, 20A Duplex GFCI	qty	2	2	2	2	2	2
125V, 30A Twist-Lock				1	1	1	1
125/250V, 20A Twist-Lock				1	1	1	1
125/250V, 30A Twist-Lock						1	1

Standard Package

Portable Generators

GP 2500A GP 5600A with wheel kit
 GP 2600 GPS 5600A
 GP 3800A GP 6600A
 GP 4000 GP 6600A with wheel kit
 GPS 6600A

include operator's manual and parts book. Some standard packages include wheel kit.


Battery sold separately.

Model Guide

G = Air-cooled portable generator
 P = Premium, S = Electric start
 2500-6600 = Maximum output in Watts, A = Honda engine

Standard models feature Wacker Neuson engines.

Please refer to our Price List and Ordering Guide for complete accessory information.

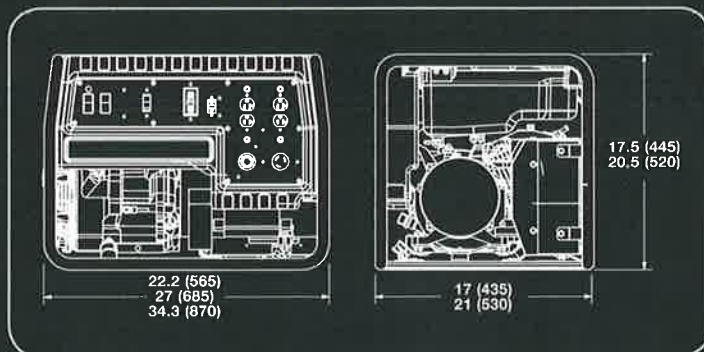

Specifications may change due to continuous product development. Users are advised to consult Wacker Neuson's Operator's Manual and website for specific information regarding the engine power rating. Actual power output may vary due to conditions of specific use.

